



Usage Areas



Technical Information

Daily Production Capacity	115kg	Finish	AISI 304 SS
Store Capacity	40 kg	Cooling System	Air
Ice Capacity Per Cycle	Continually	Product Dimension w*d*h	738*690*822
Refrigerant Gas	R290	Packing Dimension w*d*h	800*750*1000
Current	10 A	Net Weight	67 kg
Maximum Power	650 W	Loading Quantities 20 DC	46 Units
Daily Electric Consumption	11,7 Kw	Loading Quantities 40 DC	102 Units
Voltage	230V-50 Hz	Loading Quantities Optima	120 Units

Special Features



Ice Cubes and Sizes






3 gr/unit

Certifications





Product Dimensions

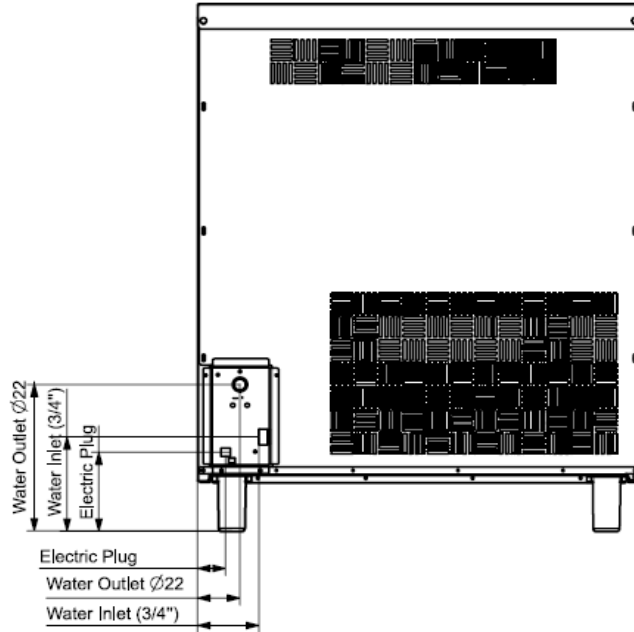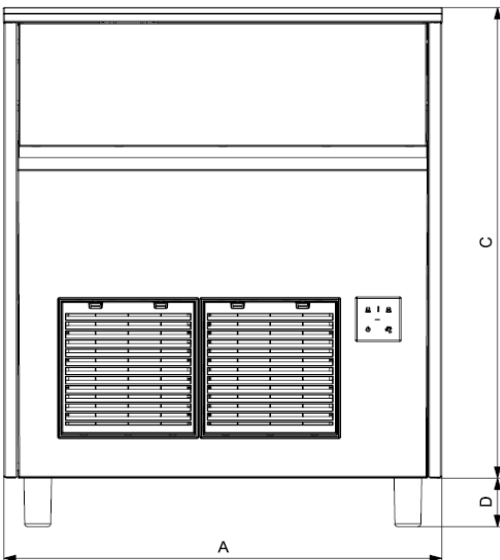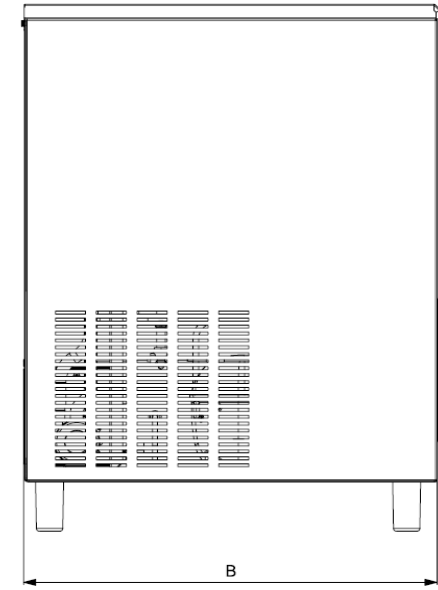

Model	A (mm)	B (mm)	C (mm)	D (mm)	Water Inlet Horizontal l (mm)	Water Inlet Vertical (mm)	Water Outlet Horizontal l (mm)	Water Outlet Vertical (mm)	Electric Plug Horizontal l (mm)	Electric Plug Vertical (mm)
FR80N	500	670	800	D1-D2	91	255	53	188	47	133
FR120N	738	600	822	D1-D2	103	163	71	253	47	133

Option	D (mm)	
Standard Adjustable Feet	D1	95
Short Adjustable Feet	D2	10

Limits

- Water inlet 3/4"
- Water outlet 22 mm
- Water Pressure Min 1 Bar/Max 5 Bar

All technical informations must be considered as following conditions

Ambient temperature : 10°C

Water temperetaure : 10°C

Electric consumption at : 20°C (Standard Voltage)

The company has righth to change all informations without notification

Ice Making Capacities

Ambient Tem. °C	Water Temperature °C			
	10°	15°	21°	32°
10°	100%	98%	95%	93%
21°	98%	96%	90%	87%
32°	90%	87%	80%	78%
38°	80%	75%	70%	60%



