



► Usage Areas



Hotel



Restaurant



Fast Food



Cocktail



Disco



Industry



► Technical Information

Daily Production Capacity	57 kg	Finish	AISI 304 SS
Store Capacity	28 kg	Cooling System	Air
Ice Capacity Per Cycle	40 Units	Product Dimension w*d*h	500*580*800
Refrigerant Gas	R290	Packing Dimension w*d*h	555*635*965
Current	10 A	Net Weight	48 kg
Maximum Power	490 W	Loading Quantities 20 DC	72 Units
Daily Electric Consumption	9,5 Kw	Loading Quantities 40 DC	216 Units
Voltage	230V-50 Hz	Loading Quantities Optima	279 Units

► Special Features



Sprayer System



Polyurethane Cabinet



Air Cooling



Easy Clean Surface



Electronic Control



Large Ice Storage Area



T Climate Type



Antibacterial Storage Area



Magnetic Pump



Door with Handle



Easy Clean Air Filter



Multifunction Button



Service Kit Drain Pump



Easy Access



Sliding Lid



Optional Touch Screen Control

► Ice Cubes and Sizes






18 gr/unit

► Certifications





Product Dimensions

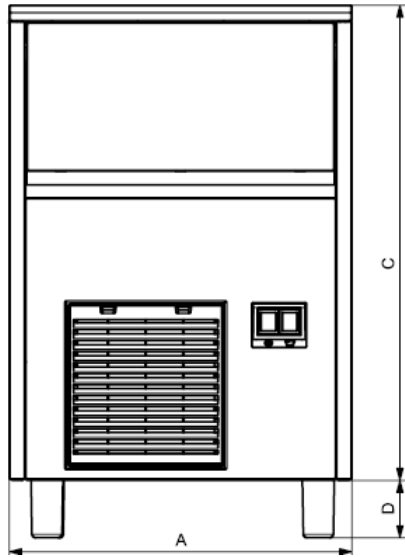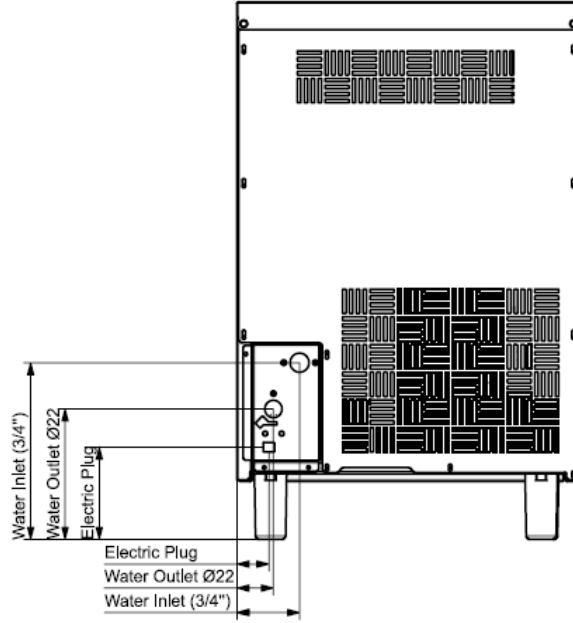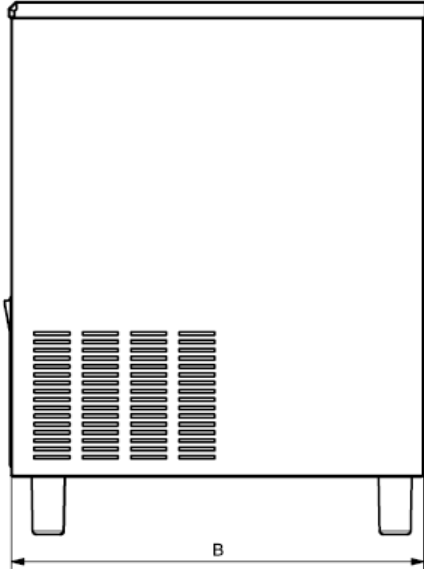

Model	A (mm)	B (mm)	C (mm)	D (mm)	Water Inlet Horizontal (mm)	Water Inlet Vertical (mm)	Water Outlet Horizontal (mm)	Water Outlet Vertical (mm)	Electric Plug Horizontal (mm)	Electric Plug Vertical (mm)
FR55H	500	580	800	D1-D2	91	255	53	188	47	133
FR95H	738	600	822	D1-D2	103	163	71	253	47	133

Option	D (mm)	
Standard Adjustable Feet	D1	95
Short Adjustable Feet	D2	10

Limits

- Water inlet	3/4"
- Water outlet	22 mm
- Water Pressure	Min 1 Bar/Max 5 Bar

All technical informations must be considered as following conditions

Ambient temperature : 10°C

Water temperetaure : 10°C

Electric consumption at : 20°C (Standard Voltage)

The company has righth to change all informations without notification

Ice Making Capacities

Ambient Tem. °C	Water Temperature °C			
	10°	15°	21°	32°
10°	100%	98%	95%	93%
21°	98%	96%	90%	87%
32°	90%	87%	80%	78%
38°	80%	75%	70%	60%



