

frozy®

FR40



Usage Areas



Hotel



Restaurant



Fast Food



Cocktail



Disco



Industry



Technical Information

Daily Production Capacity	40 kg/37 kg	Finish	AISI 304 SS Scotch Brite
Store Capacity	16 kg	Cooling System	Air
Ice Capacity Per Cycle	36 Units	Product Dimension w*d*h	500*580*690
Refrigerant Gas	R134a-R404a/R290	Packing Dimension w*d*h	555*635*855
Current	10 A	Net Weight	40 kg
Maximum Power	550 W/520 W	Loading Quantities 20 HC	72 Units
Daily Electric Consumption	11,0 kW/10,4 kW	Loading Quantities 40 HC	216 Units
Voltage	230V-50/60Hz/230V-50Hz 115V-60 Hz	Loading Quantities Optim	279 Units

Special Features



Spreyer System



Polyurethane Cabinet




Air Cooling



Easy Clean Surface



Electronic Control



Large Ice Storage Area



T Climate Type



Antibacterial Storage Area



Magnetic Pump



Door with Handle



Easy Clean Air Filter



Multifunction Button



Service Kit Drain Pump



Easy Access




Sliding Lid



Optional Potentiometer

Ice Cubes and Sizes



18 gr/unit

Certifications



frozy®

TASIS MAK.MÜH.SAN.TİC.A.Ş.

Org.San.Böl. 34.Cad. No:11,
26110, Eskişehir/Turkey

+ 90 222 236 82 20

+ 90 222 236 82 21

info@frozy.com.tr



CLIMAX COOLER MAK.MÜH.DAN.A.Ş.

Org.San.Böl. 34.Cad. No:11,
26110, Eskişehir/Turkey

+ 90 222 236 82 20

+ 90 222 236 82 21




info@climaxcooler.com



www.frozy.com.tr



Product Dimensions

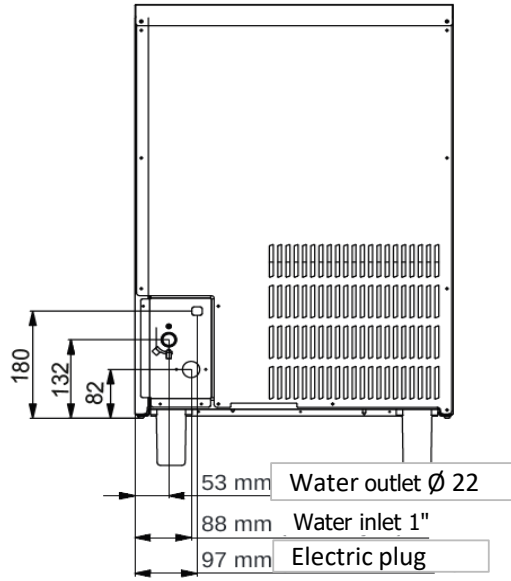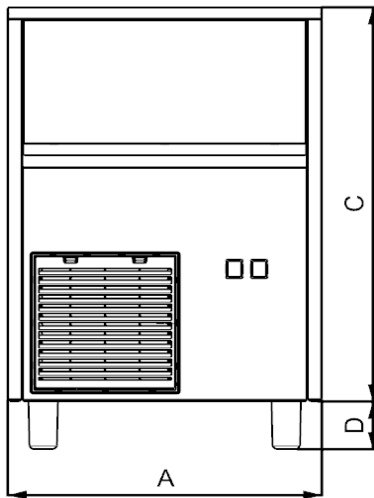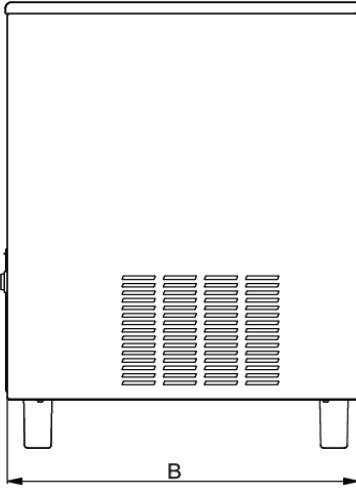

Model	A (mm)	B (mm)	C (mm)	D (mm)	Weight
FR25	355	435	590	D2	26 kg
FR30	390	515	640	D1	32 kg
FR35	500	580	690	D1	38 kg
FR40	500	580	690	D1-D2	40 kg
FR50	500	580	800	D1-D2	45 kg
FR60	500	580	800	D1-D2	48 kg
FR70	738	600	822	D1-D2	75 kg
FR90	738	600	822	D1-D2	85 kg

Option	D (mm)	
Standard Adjustable Feet	D1	78,5
Short Adjustable Feet	D2	10

Limits

- Water inlet 1"
- Water outlet 22 mm
- Water Pressure Min 1 Bar/Max 5 Bar

All technical informations must be considered as following conditions

Ambient temperature :20°C

Water temperataure :15°C

Electric consumption at :+32 °C (Standart Voltaj)

The company has righth to change all informations without notification

Ice Making Capacities

R134a-R404a

Ambient Tem.°C	Water Temperature °C			
	10°	15°	21°	32°
10°	100%	98%	95%	93%
21°	98%	96%	90%	87%
32°	90%	87%	80%	78%
38°	80%	75%	70%	60%

R290

Ambient Tem.°C	Water Temperature °C			
	10°	15°	21°	32°
10°	100%	98%	95%	93%
21°	98%	96%	90%	87%
32°	90%	87%	80%	78%
38°	80%	75%	70%	60%

